




# C246 WSI




M.2 Slot, (2230/2242/2260/2280, Supports PCIe 3.0(x4)/SATA3)  
 2 DIMM slots, DDR4 2666/2400 ECC/non-ECC UDIMM

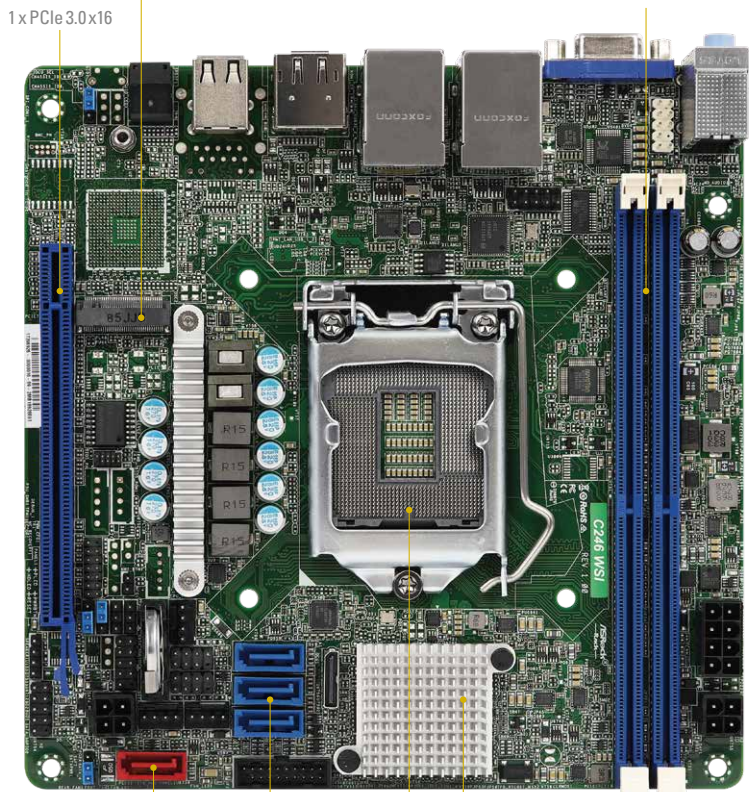

1 x PCIe 3.0x16  
 1 x SATA DOM (Shared with M.2)  
 SATA36.0 Gb/s  
 Intel® C246 Chipset  
 Intel® Xeon® E-2100 Processors

### Application

- NAS System
- Mini Workstation
- Modular Rendering Machine

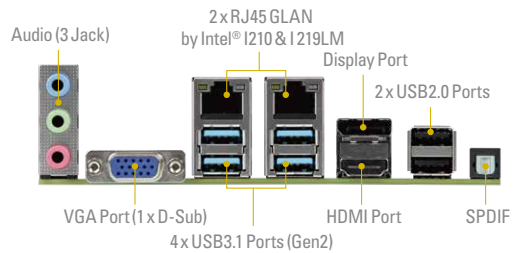

Audio (3 Jack)  
 2x RJ45 GLAN by Intel® I210 & I219LM  
 Display Port  
 2x USB2.0 Ports  
 VGA Port (1 x D-Sub)  
 4x USB3.1 Ports (Gen2)  
 HDMI Port  
 SPDIF

		C246 WSI
<b>Form Factor</b>		Mini-ITX (6.7" x 6.7")
<b>Processor Support</b>		Single Socket LGA1151 Intel® Xeon® E-2100 Series Processors
<b>Memory</b>		2 DIMM Slots, DDR4 2666/2400 ECC, U DIMM
<b>Storage Capacity</b>	Intel PCH	8 x SATA3 6.0 Gb/s by Intel® C246 (SATA 0-3 by OCuLink, SATA 5-7 by SATA CONN)
	Additional	N/A
<b>Expansion Slots</b>		1 x PCIe 3.0x16
<b>Ethernet</b>	LAN Controller	1 x Intel® i210+1 x Intel® i219
	LAN Port	RJ45:2
<b>USB 3.0</b>		6(4 from rear I/O, 2 via header)
<b>USB 2.0</b>		2(2 from Rear)
<b>M.2</b>		1 (2242, PCIe (x4)/SATA3 6Gb/s (SATA 1)

Intel® Xeon® E-2200