


SP2C621D16-2T

SP2C621D16-2L+

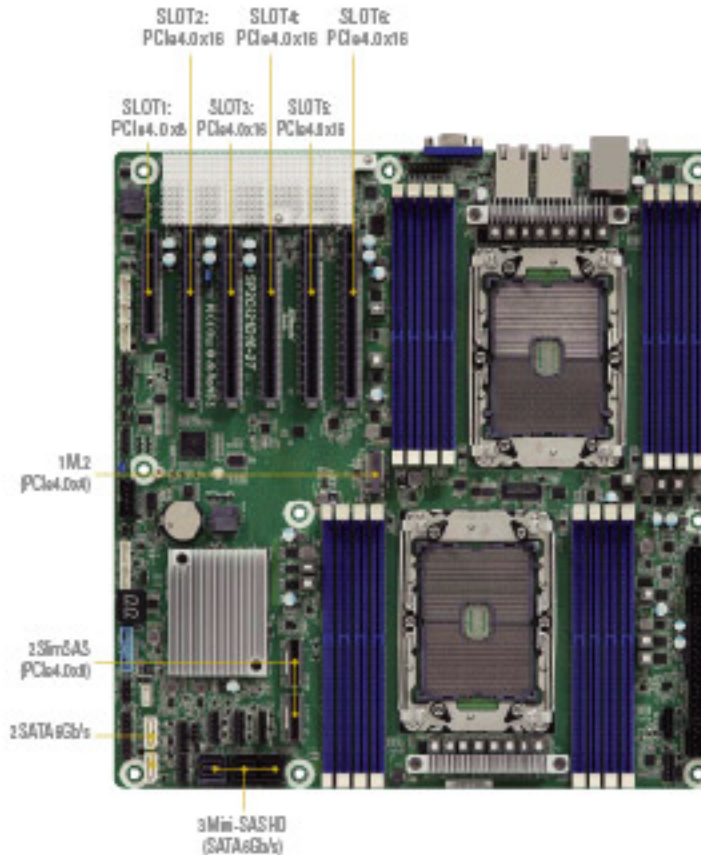

Application

- Storage Server
- Mainstream server for SMB
- High-end workstation/ industrial application



		SP2C621D16-2T	SP2C621D16-2L+
Form Factor		EEB (12" x 13")	
Processor System	CPU PCH	1+1 Socket P+ 4189 pin, Supports 3rd Gen Intel® Xeon® Scalable Processors Intel® C621A	
Memory	Capacity	8+8 DDR4 288-pin DIMM Slots (10PC), supports: RDIMM up to 64GB each, max. 3200MHz LRDIMM up to 128GB each, max. 3200MHz RDIMM/LRDIMM-3DS up to 256GB each, max. 3200MHz Intel® Optane™ Persistent Memory 200 Series	
Expansion	PCIe slot Others	3 PCIe4.0 x16 [CPU1] 2 PCIe4.0 x16, 1 PCIe4.0 x8 [CPU0] 2 SlimSAS (PCIe4.0 x8) [CPU0]	
Storage	M2 SATA port	1 M-key (PCIe4.0 x4), supports 22110/2280 form factor 14 SATA 6Gb/s; 3 Mini-SAS HD, 2 SATA 7-pin	
Network	RJ45	2 RJ45 (10GbE) by Intel® X550-AT2	2 RJ45 (1GbE) by Intel® I350-AM2
Management	BMC Dedicated IPMI	ASPEED AST2500: IPMI 2.0 1 RJ45 via Realtek RTL8211E	
I/O	USB COM port	4 USB3.2 Gen1 ports: 2 rear Type-A, 2 via 19-pin header 9-pin header	
Security	TPM	Supports 13-pin (SPI) TPM modules	